



Perfect for **Filtering**
and **Softening** in
ONE System.




7-Year Limited
Factory Warranty
on all Signature
Series Valves

Combination Softener & Filter

FEATURES

- Perfect for Filtering and Softening in ONE system
- Features Enpress® Vortech™ mid plate technology
- *Signature Series™* or *Signature Series 2™* timeclock or meter initiated controls
- Advanced Electronic Technology & Simple programming
- Adjustable cycle times
- Calendar Day Override (metered versions only)
- Battery Back-Up
- Independently operated inlet/outlet bypass valve
- 3/4" FNPT stainless steel connection
- 1" FNPT stainless steel connection (optional)
- High Flow 1" distributor tube
- High capacity cation exchange resin
- Dome fill opening for ease of service
- High Flow brine safety float assembly, overflow fitting, grid plate, and brine well
- Other valve options available at an additional cost

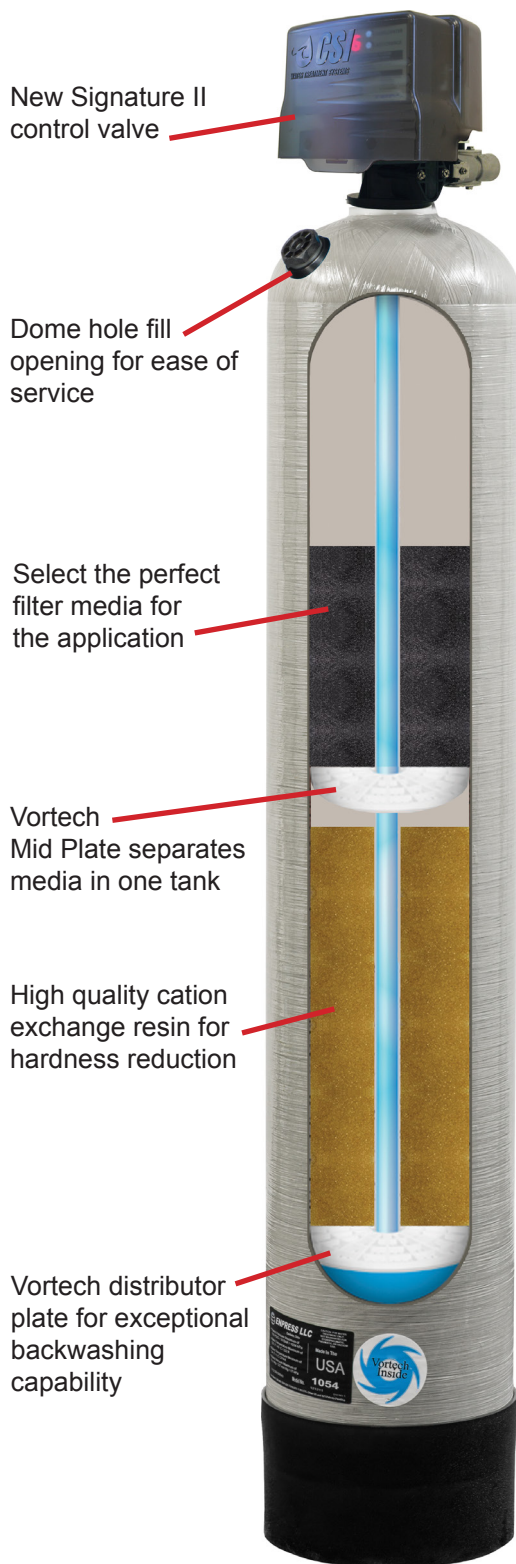

General Specifications	Two Tanks in One	
	TSF32-10D MSF32-10D	TSF48-15D MSF48-15D
FILTER MEDIA	1 cu ft	1.5 cu ft
Softening Capacity	32,000	48,000
Salt Used/Regeneration (lbs)	15.0	24.0
Service Flow Rate (gpm)	5	8
Intermittent Flow Rate (gpm)	7	10
Backwash Flow Rate (gpm)	5	7
Mineral Tank Size (inches)	10x65	13x65
Gallons Used / Backwash	130	170
Space Required (DxWxH inches)	18x28x73	18x31x73
Approximate Shipping Weight (lbs)	126	182

Notes:

The pressure drop does not exceed 15.0 psi at the service flow rate.
Factory Salt Setting; 15lbs./cu ft

