




PFAS Point of Use (POU) Removal System Manual

Forever chemicals (PFAS) pose serious health risks and contaminate water.

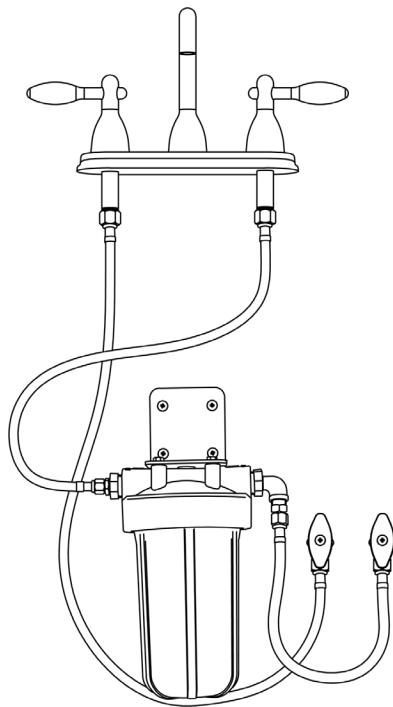


Dimensions	Flow Rate	Gallons Capacity
4.5" x 10"	1.51 gpm	8,575

Register your product online at
www.chandlersystemsinc.com

Designed to be installed easily with flexible Stainless lavatory supply lines, supplied by others, this unit can be installed in minutes.

Using the provided bracket, mount the housing on the side wall of the cabinet under the sink, making sure that the Stainless-steel elbow is towards the front of the cabinet. **You will need to leave at least a 2" space below the housing for cartridge replacement.** Make sure to leave enough room for the cabinet door to close completely. (See Fig. 1)

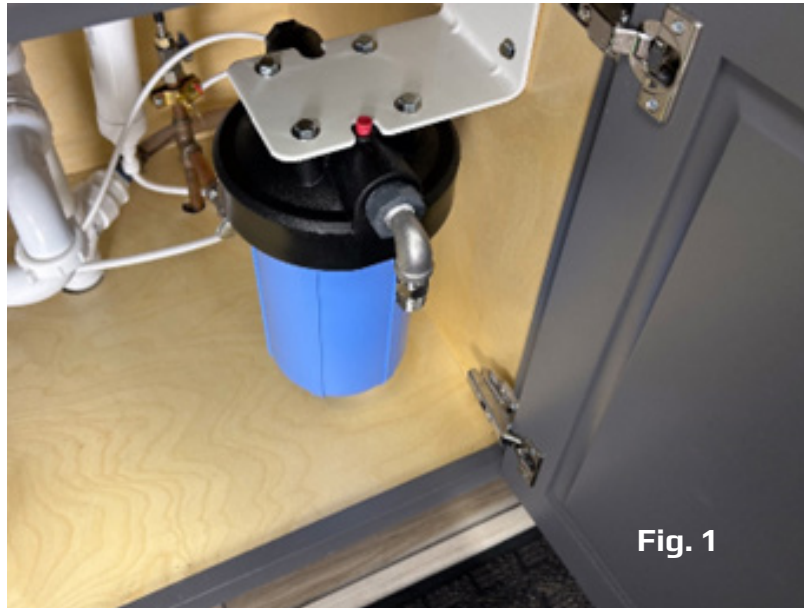

Attach the appropriate length supply line to the cold-water supply stop and connect the other end to the ½" stainless nipple on the front side of the unit. This is your cold-water inlet. (See Fig. 2)



Then attach another appropriate length supply line to the 3/8" compression fitting on the supply side of the housing, and the other end to the cold-water side of your faucet. (See Fig. 3)

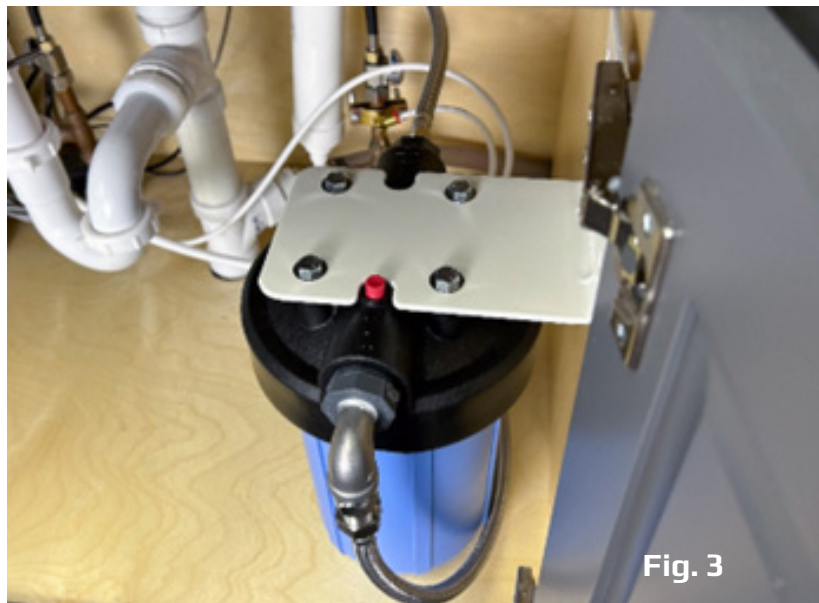


Fig. 3

Note: Some faucet manufacturers have integrated supply lines on their faucets from the factories. These are compatible with the discharge fitting on the housing. Once the unit has been installed completely, open the cold side of the faucet, slowly turn on the cold-water supply and allow the water to flow from the kitchen faucet for about 10 minutes. This is to rinse the media and to purge any air out of the cartridge. Once the time is up, turn the cold water off and check for any leaks.