


# ZAPPR

**99% Radon Removal**

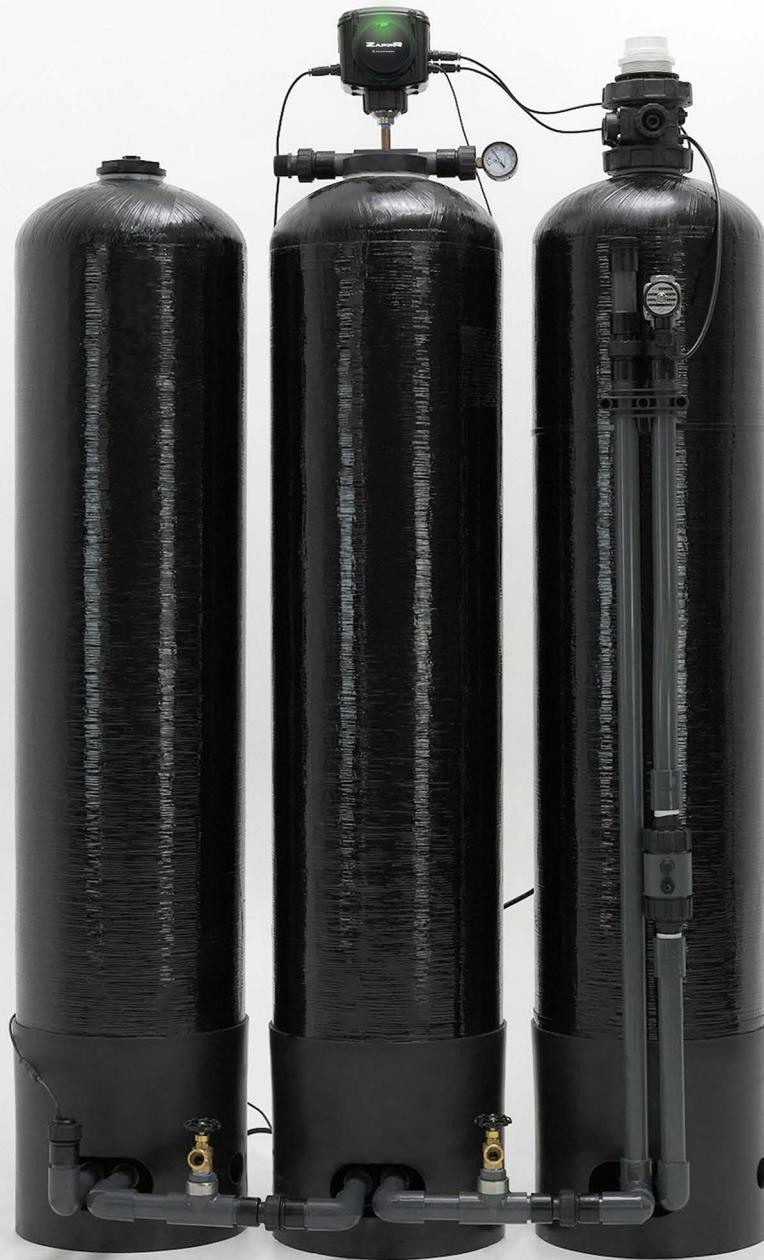

### Electric Control:

Operates the domestic delivery pump and protects its operation for run dry and overcurrent.  
Reads tank levels without floats through the CSI pressure transducer  
Cycles inlet valve and blower plus optional chlorine feed pump

### Customizable Holding Tank System:

#### Tailored to Your Home

Recommended holding tank setup based on the number of bathrooms for optimal performance.



### High-Performance Blower System:


#### 1 HP, 120-Volt Motor

Delivers strong, consistent airflow with standard household power.

#### Pressurizes the Tank

Efficiently forces radon-contaminated air out through the top exhaust.

#### Includes Replaceable Air Filter

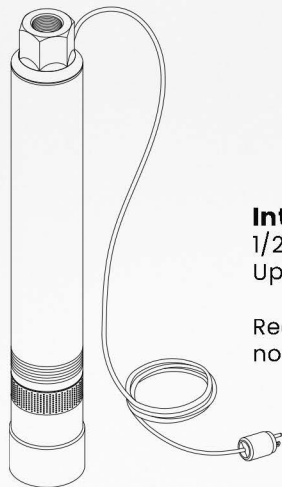


### Internal 120V Repressurization Pump

1/2 HP  
Up to 12 GPM at 60 PSI

Requires an additional pressure tank, not included



Injector



Quadtrain

### Quadtrain Technology:


#### Adjustable Flow Rate

Tailor the system's performance to your home or facility's water demands.

#### 4 Injector Design

Maximizes air draw into the ZAPPR tank for superior radon removal.

### 2" Connection Point for Radon Venting System

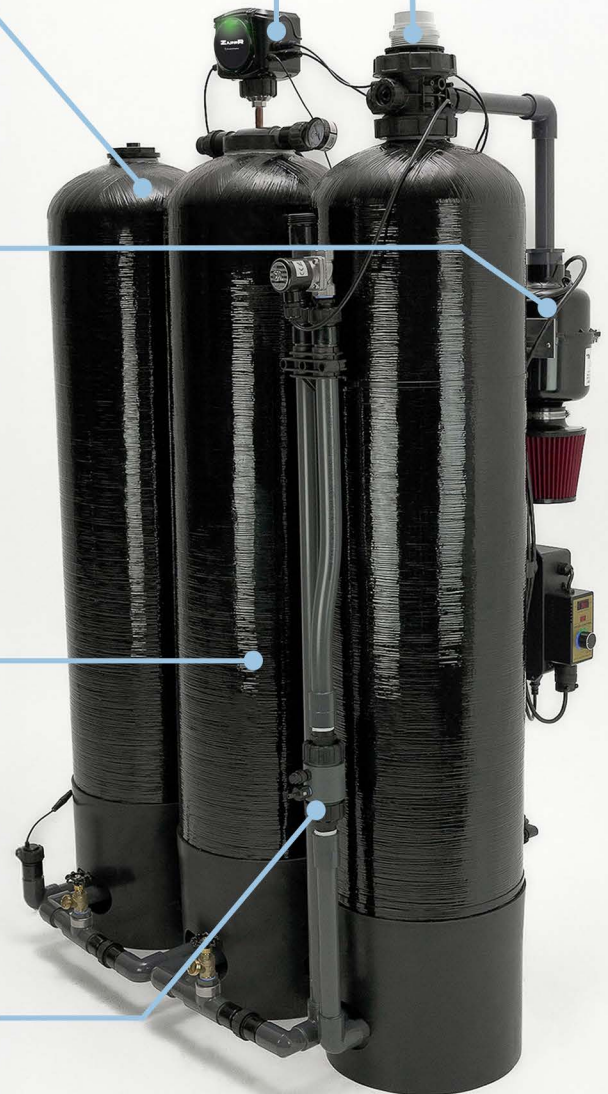

**Model:** ZPR13

**Treatment Rate:** 2.5-10 GPM

**Flow Rate:** Up to 20 GPM

**Minimum Space Required:** 72"W x 28"D x 80"H



chandlersystemsinc.com